
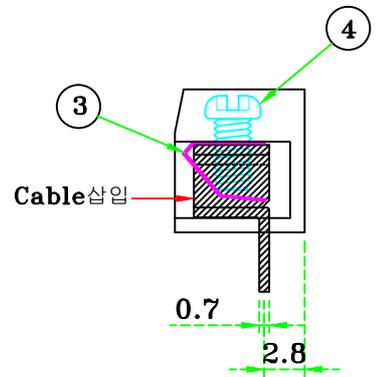
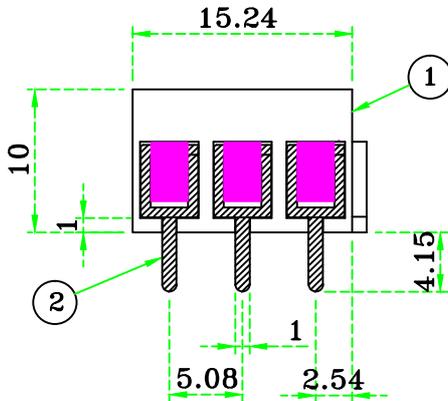




|                       |                             |
|-----------------------|-----------------------------|
| Current rating        | AC250V 6Amp                 |
| Insulation resistance | 500M Ohms of More at DC500V |
| Withstand voltage     | AC2000V/Minute              |
| Wire range            | AWG #18~#26                 |
| Torque                | 4.0lb-in                    |

|   |                |                   |                |
|---|----------------|-------------------|----------------|
| 5 |                |                   |                |
| 4 | Screw          | Steel             | Ni M2.6        |
| 3 | Wire protector | Stainless steel   |                |
| 2 | Terminal       | Brass             | Tin            |
| 1 | Base           | PBT_Natural Color | UL94V0         |
|   | Part Name      | Material          | Plating Remark |

(Base\_Natural Color는  
백색으로 보임)

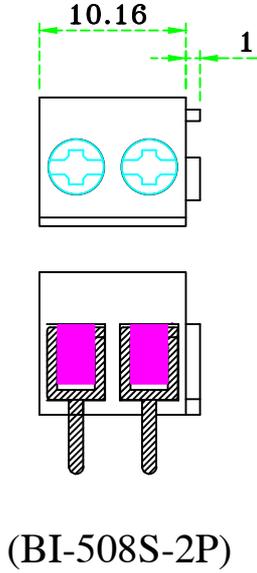

PCB hole Dia:  $\phi 1.6$

**Note.**

1. 지시하지 않은 공차: **GENERAL TOLERANCES**

(2P & 3P Assemble)

|                    |           |                |  |              |
|--------------------|-----------|----------------|--|--------------|
| GENERAL TOLERANCES |           | Part Name.     | MOEDL No.  |              |
| 0 ~ 10             | $\pm 0.2$ | Terminal Block | BI-508S-*P   |              |
| 11 ~ 50            | $\pm 0.5$ | SIZE           | Drawing BY.  | Approval BY. |
| 51 ~ 100           | $\pm 0.8$ | A4             |  | Sheet No.    |
| Scale              | /         | UNIT           | (주)부일일렉트로닉스<br>BUIL ELECTRONICS CO.,LTD<br>www.ebuil.com |              |
| Material           |           | mm             |  |              |
| Finish             |           |                |  |              |