
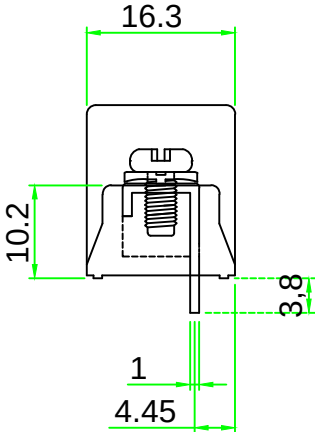
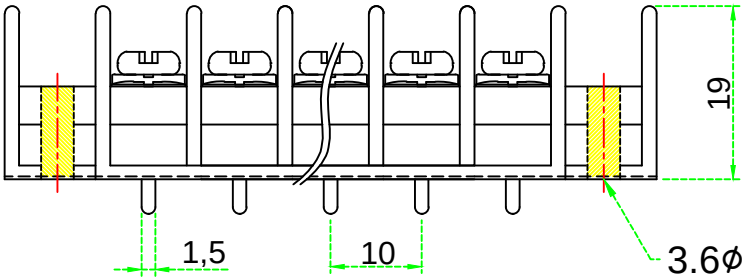


1					2					3					4				
4						Current rating					AC250V 18Amp								
3	Screw	Steel	Ni	M3.5		Insulation resistance					1000M Ohms of More at DC500V								
2	Terminal	Brass	TIN	1/2H		Withstand voltage					AC2000V/Minute								
1	Base	PBT		UL94 V-0		Wire range					AWG #14~22								
	Part Name	Material	Plating	Remark		Torque					6.9 lb-in								

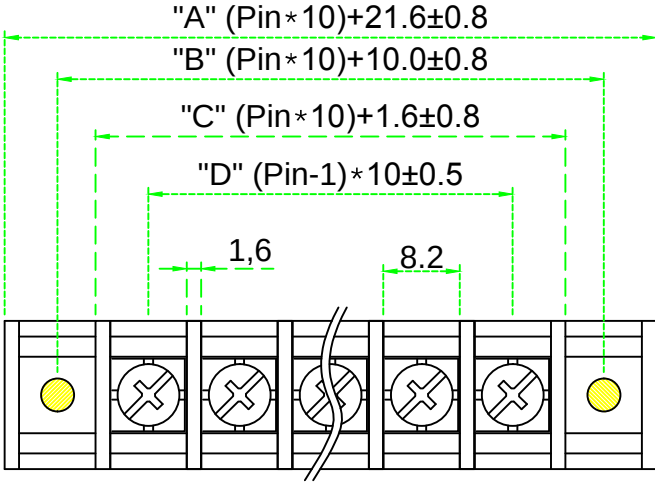

PCB hole Dia: ø2.0

- Note.**
- 1. **One Mold** 최대 핀수: 18Pin
 - 2. **Base** 연결용 최대 핀수 : ∞
 - 3. **Cover** 사용시 모델No. : BI-10A-1FC-*P_(Option)
 - 4. 지시하지 않은 공차: **GENERAL TOLERANCES**

GENERAL TOLERANCES			Part Name.		Dwg No.	
0 ~ 50	±0.3		Terminal block		BI-10A-1F-*P	
50 ~ 100	±0.5					
100 ~ 150	±0.8					
150 ~ 200	±1.0					
Scale		/	Drawing BY.	Checkd BY.	Approval BY.	Sheet No.
Materral						of
Finish						
			(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com			